
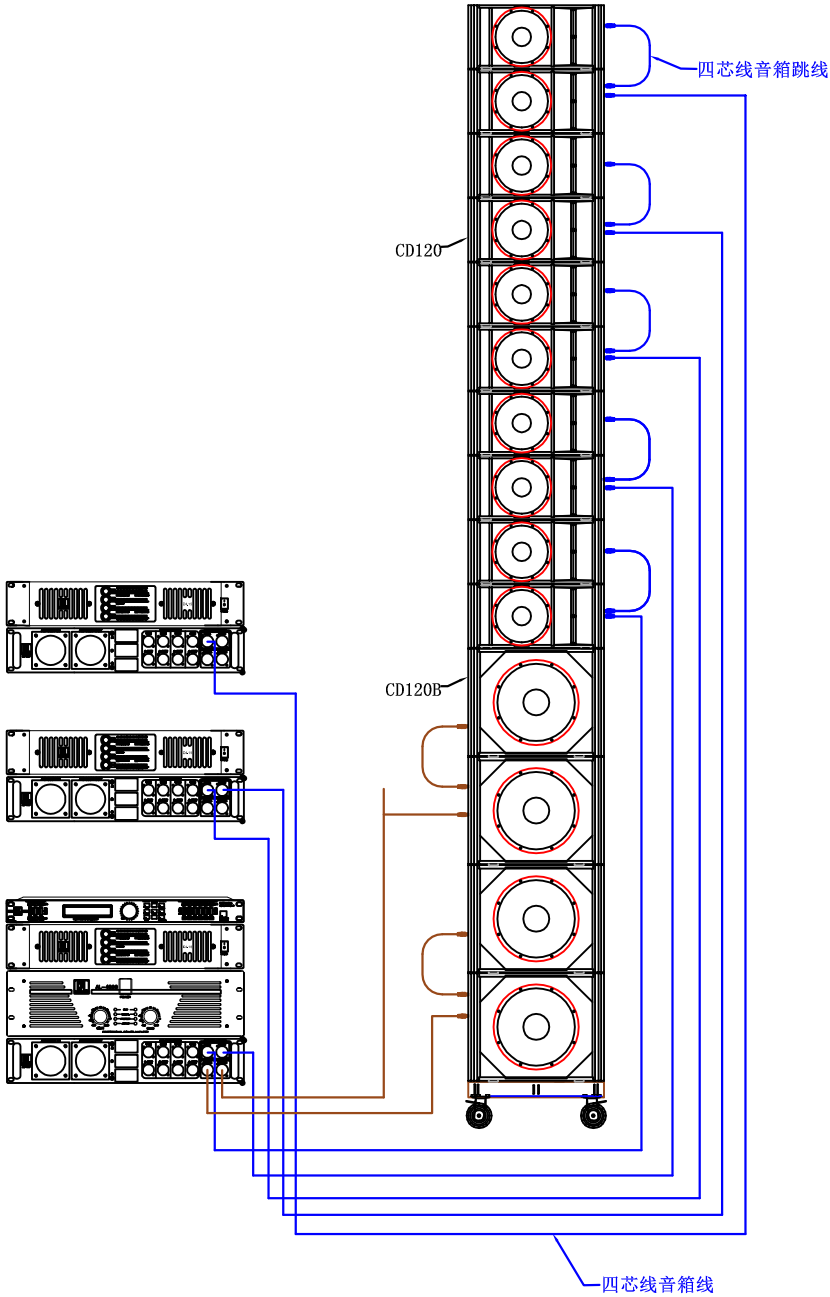


10+4B

CPL“君子龙” CD120+CD120B+CD120system


1+	LF+
1-	LF-
2+	HF+
2-	HF-

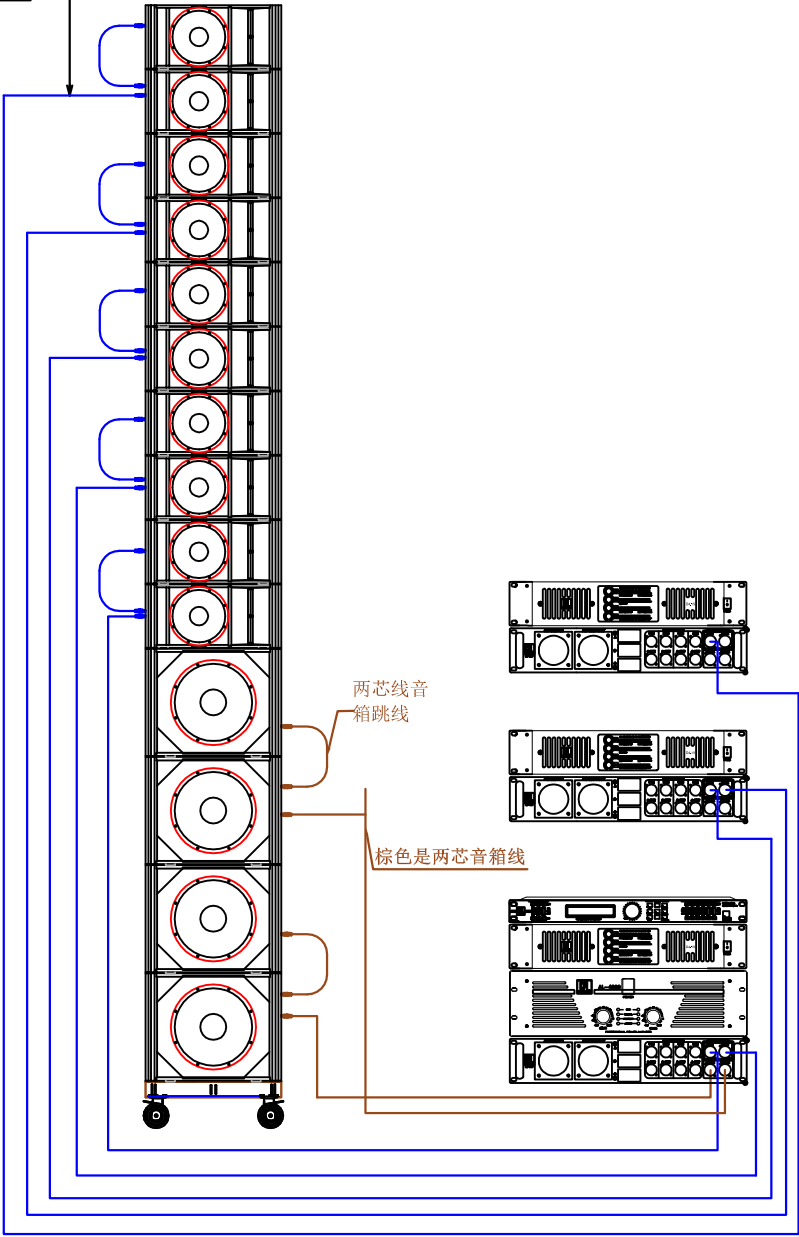


- 1、4. 15功放输入灵敏度:150V (35dB)
- 2、AL-4800功放输入灵敏度:0. 775V (180V)
- 3、处理器数据选择10+4B

CD120system processor (IN):
A=L B=R C=SUB


CD120system processor (OUT):
1=L-HF 2=L-LF 3=R-HF 4=R-LF 5=SUB 6=SUB

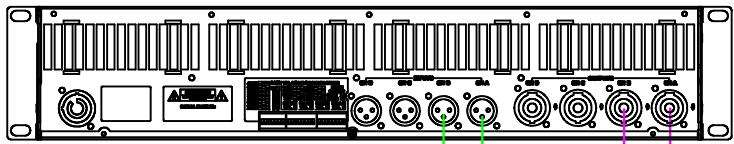


D4.15

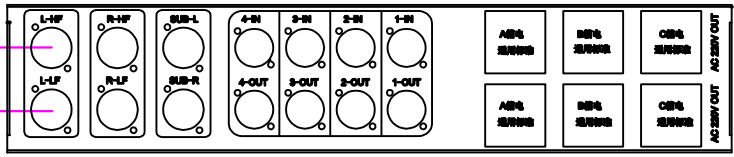


AL-32B




CD120system

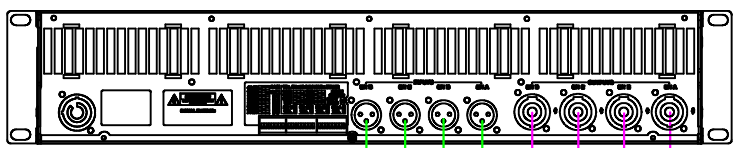


D4.15

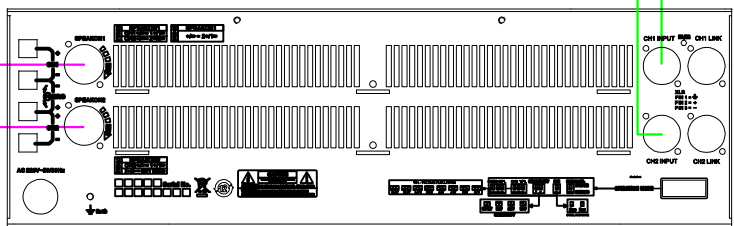


AL-4800

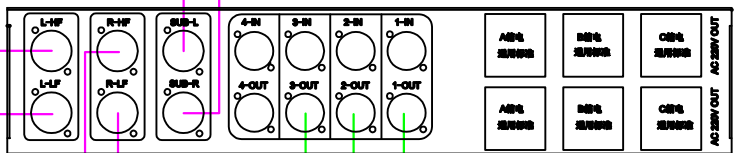

AL-32B

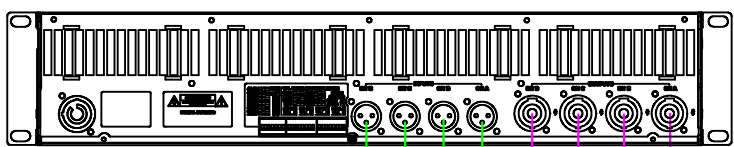

D4.15

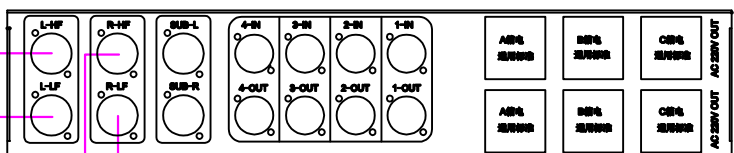

AL-32B

绿色线是信号线

粉红色是两
芯音箱线